


# 92"

# NOVA 5 MAX

## Technical Specification

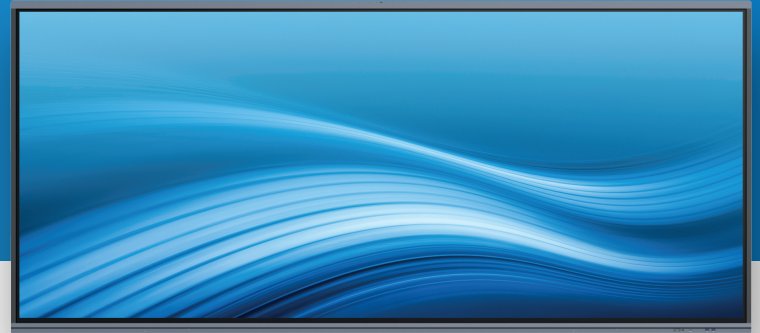

5K Ultra HD Display



Octa-Core CPU



Android 13.0



50 Touch Points




Hi-Fi Speaker



8 GB RAM



64 GB ROM

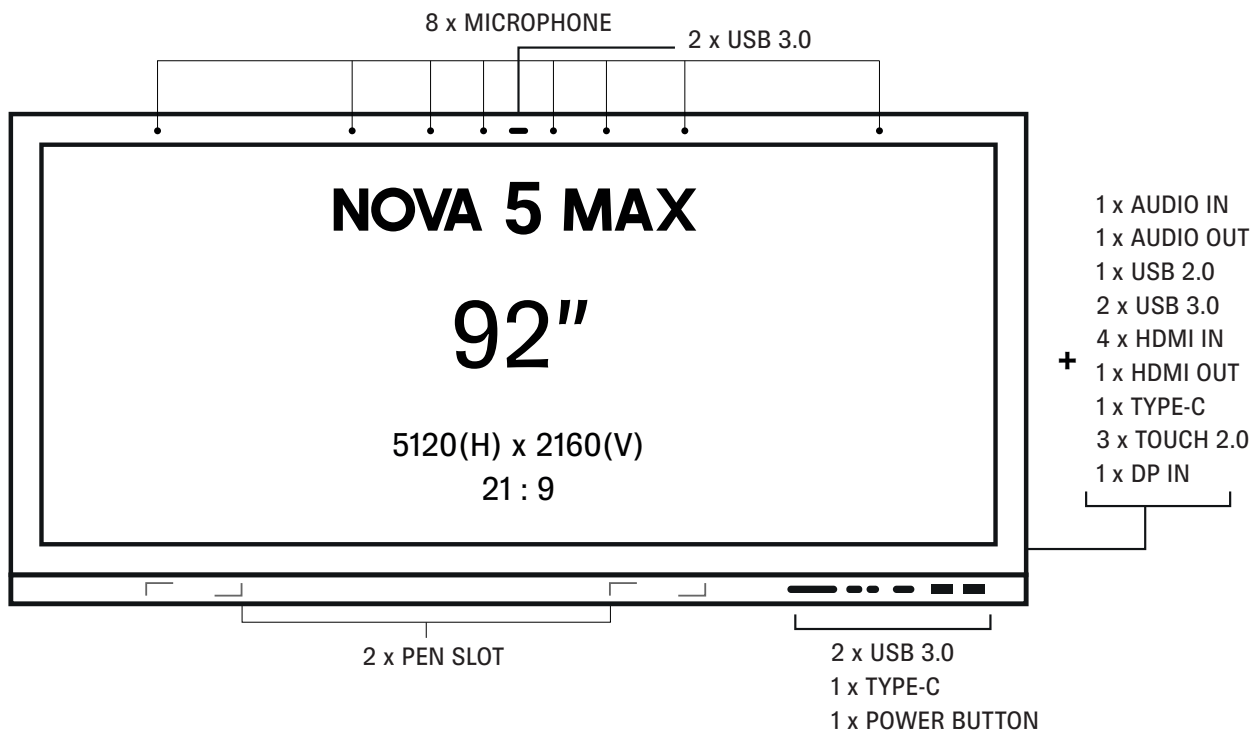

Airclass Voting



Palm Swipe Erasing



Over The Air Updates



Wi-Fi 6E



Bluetooth 5.2



QR Code Screen lock



10 Bit Color



Light Sensor



Pressure Sensitivity



100 Watt Type-C Input



Zero Bonding Technology



Double Pen Function



Blue Light Filter



Safe Operating System



Specific Software Solutions



Screen Share



Screen Recorder



Palm Rejection



# Technical Specification

Display Parameters		Front Interface	
LCD Size	92"	USB 3.0	2 x Front, 2 x Top
Response Time	5 ms	TYPE-C	1
Aspect Ratio	21:9	KEYS	1 x Power
Resolution	5120(H) x 2160(V)	<b>Audio</b>	
Display Area	2141,952(H) x 903.636 (V)	Sound Channel	2.1
Display Colors	1.07B(10bit)	Speaker	2 x 20W + 20W
NTSC(typ)	90%	dBSPL	90dB@1m, Pink Noise
Contrast Ratio	4000:1	<b>Microphone</b>	
Viewing Angle	178° (H/V)	Quantity	8
Back light Unit	DLED	Distance of a Pickup	0~8m
Brightness	450cd/m <sup>2</sup>	<b>Power</b>	
Life Time	50000 hours	Power Requirements	100-240V~50/60Hz
Refreshing Frequency	60Hz	Max Power x [2] (W/OPS)	TBD
<b>System</b>		Stand By Power	≤ 0.5W
System Version	Android 13	AC OUT	100-240V~, 50/60Hz Max Power 250W
CPU	A76 x 4 + A55 x 4	<b>Physical Specification</b>	
GPU	Mali-G610 MP4	Dimension L x H x D	2203 x 1000 x 92mm
RAM	8 GB	Dimension(package) L x W x H	2335 x 225 x 1140 mm
ROM	64 GB	Thickness of Machine	119mm
<b>Touch Specification</b>		and Wall Mount	
Sensing Type	Infrared recognition	Wall-hanging Screw Spec	M8 x 25mm
Supported System	Windows 11 / Android / Linux / Mac OS X / Chrome	VESA	800 x 600mm
Touch Points	50 touch points	Net Weight	TBD
Minimum Object Size	2mm	Gross Weight	TBD
Input Mode	Opaque object (finger, pen, etc.)	<b>Accessories</b>	
Response Time	≤5ms	Power Cord	x1
Accuracy	±1mm	Writing Pen	x2
Writing Height	≤2mm	HDMI Cable	x1
Palm Rejection	Yes	USB Touch Cable (Type A - B)	x1
Interpolation Resolution	32768 (W) x 32768 (D)	Remote Control	x1
Touch Tool	Passive infrared pen, Active infrared pen	<b>Environmental Conditions</b>	
<b>Onboard Interface</b>		Operation Temperature	0~ 40
HDMI IN	4	Operation Humidity	10% - 90%RH
		Storage Temperature	-20~ - 60
HDMI OUT	1	Storage Humidity	10% - 90%RH
USB 2.0	1	Altitude	<5000m
USB 3.0	6	<b>Optional Modules</b>	
		PC Module	OPS
USB TYPE-C IN	2		
TOUCH 2.0	3		
DP IN	1		
AUDIO IN	1		
AUDIO OUT	1		
SPDIF	1		
SD232	1		
RJ45 IN	1		
RJ45 OUT	1		

